Si consiglia la posa con fuga 2 mm. - Laying with a 2 mm-joint is recommended.
Pose recommandée avec joints de 2 mm. - Es wird eine Fugenbreite von 2 mm empfohlen.
Se recomienda la colocación con juntas de 2 mm. - Рекомендуется укладка с швом 2 мм.

La tecnologia Silktech combina prestazioni antiscivolo elevate e una superficie ceramica setosa al tatto.
The Silktech technology combines excellent anti-slip performances with a ceramic surface that's silky to the touch.

Colori e formati Colours and Sizes | Couleurs et Formats | Farben und Formate | Colores y Tamaños | Цвета и Форматы

ONYX IVORY

6,5 mm.

120x278 - $47^{1/4"}$x$109^{7/16"}$
Full Lappato Rett.
EKPH Onyx Ivory ● **T116**
5 patterns

10 mm.

90x180 - $35^{7/16"}$x$70^{7/8"}$
Full Lappato Rett.
EL8S Onyx Ivory ● **T93**
10 patterns

9,5 mm.

90x90 - $35^{7/16"}$x$35^{7/16"}$
Full Lappato Rett.
EKU1 Onyx Ivory ● **T74**
19 patterns

120x120 - $47^{1/4"}$x$47^{1/4"}$
Full Lappato Rett.
ELDM Onyx Ivory ● **T110**
11 patterns

9,5 mm.

60x120 - $23^{5/8"}$x$47^{1/4"}$
Full Lappato Rett.
EKTP Onyx Ivory ● **T74**
17 patterns

Silktech R10 Rett.
EKTA Onyx Ivory ● **T31**
14 patterns

9,5 mm.

30x60 - $11^{13/16"}$x$23^{5/8"}$
Full Lappato Rett.
EKTV Onyx Ivory ● **T42**
68 patterns

Silktech R10 Rett.
EKTH Onyx Ivory ● **T14**
56 patterns

ONYX PINK

6,5 mm.



120x278 - $47^{1/4"}$x$109^{7/16"}$
Full Lappato Rett.
EKPG Onix Pink ● **T116**
5 patterns

9,5 mm.

90x90 - $35^{7/16"}$x$35^{7/16"}$
Full Lappato Rett.
EKU0 Onyx Pink ● **T74**
14 patterns



120x120 - $47^{1/4"}$x$47^{1/4"}$
Full Lappato Rett.
ELDL Onyx Pink ● **T110**
11 patterns

9,5 mm.

60x120 - $23^{5/8"}$x$47^{1/4"}$
Full Lappato Rett.
EKTN Onyx Pink ● **T74**
17 patterns

Silktech R10 Rett.
EKT9 Onyx Pink ● **T31**
18 patterns

9,5 mm.

30x60 - $11^{13/16"}$x$23^{5/8"}$
Full Lappato Rett.
EKTU Onyx Pink ● **T42**
64 patterns

Silktech R10 Rett.
EKTG Onyx Pink ● **T14**
64 patterns

TELE DI ONYX Marmo


Si consiglia la posa con fuga 2 mm. - Laying with a 2 mm-joint is recommended.
Pose recommandée avec joints de 2 mm. - Es wird eine Fugenbreite von 2 mm empfohlen.
Se recomienda la colocación con juntas de 2 mm. - Рекомендуется укладка с швом 2 мм.

La tecnologia Silktech combina prestazioni antiscivolo elevate e una superficie ceramica setosa al tatto.
The Silktech technology combines excellent anti-slip performances with a ceramic surface that's silky to the touch.

Colori e formati Colours and Sizes | Couleurs et Formats | Farben und Formate | Colores y Tamaños | Цвета и Форматы

ONYX GREEN

6,5 mm.

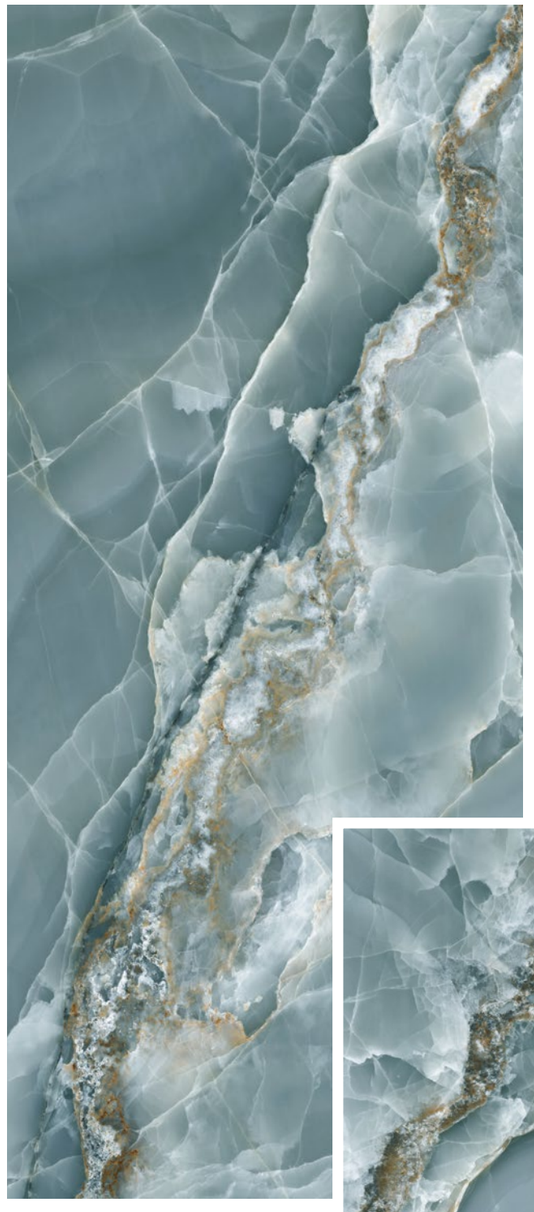

120x278 - $47^{1/4"}$x$109^{7/16"}$
Full Lappato Rett.
EKPJ Onyx Green ● **T116**
6 patterns


9,5 mm.

90x90 - $35^{7/16"}$x$35^{7/16"}$
Full Lappato Rett.
EKU2 Onyx Green ● **T74**
14 patterns

9,5 mm.

60x120 - $23^{5/8"}$x$47^{1/4"}$
Full Lappato Rett.
EKTQ Onyx Green ● **T74**
17 patterns

Silktech R10 Rett.
EKTC Onyx Green ● **T31**
17 patterns

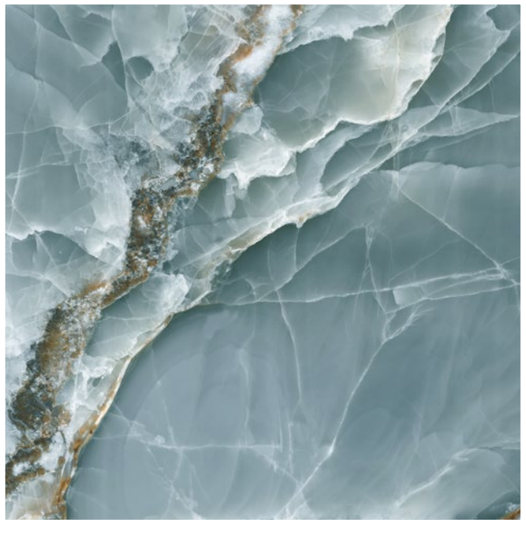

120x120 - $47^{1/4"}$x$47^{1/4"}$
Full Lappato Rett.
ELDN Onyx Green ● **T110**
12 patterns


9,5 mm.

30x60 - $11^{13/16"}$x$23^{5/8"}$
Full Lappato Rett.
EKTW Onyx Green ● **T42**
56 patterns

Silktech R10 Rett.
EKTJ Onyx Green ● **T14**
60 patterns

ONYX BLUE

6,5 mm.

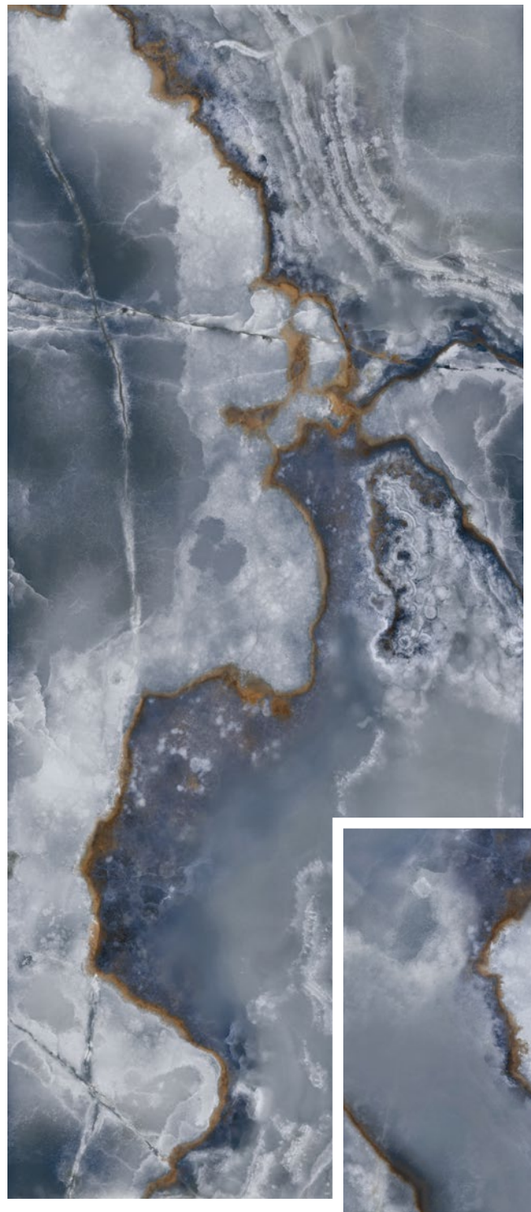

120x278 - $47^{1/4"}$x$109^{7/16"}$
Full Lappato Rett.
EKPK Onix Blue ● **T116**
6 patterns


9,5 mm.

90x90 - $35^{7/16"}$x$35^{7/16"}$
Full Lappato Rett.
EKU3 Onyx Blue ● **T74**
14 patterns

9,5 mm.

60x120 - $23^{5/8"}$x$47^{1/4"}$
Full Lappato Rett.
EKTR Onyx Blue ● **T74**
15 patterns

Silktech R10 Rett.
EKTD Onyx Blue ● **T31**
15 patterns

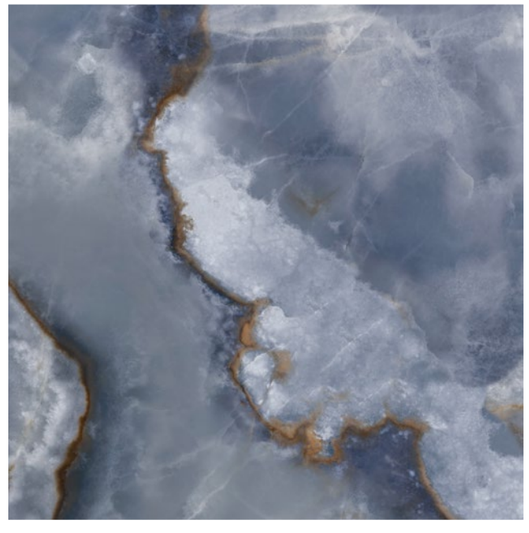

120x120 - $47^{1/4"}$x$47^{1/4"}$
Full Lappato Rett.
ELDP Onyx Blue ● **T110**
10 patterns

9,5 mm.

30x60 - $11^{13/16"}$x$23^{5/8"}$
Full Lappato Rett.
EKTX Onyx Blue ● **T42**
48 patterns

Silktech R10 Rett.
EKTK Onyx Blue ● **T14**
52 patterns


TELE DI ONYX Marmo

Si consiglia la posa con fuga 2 mm. - Laying with a 2 mm-joint is recommended.
Pose recommandée avec joints de 2 mm. - Es wird eine Fugenbreite von 2 mm empfohlen.
Se recomienda la colocación con juntas de 2 mm. - Рекомендуется укладка с швом 2 мм.

Colori e formati Colours and Sizes | Couleurs et Formats | Farben und Formate | Colores y Tamaños | Цвета и Форматы

ONYX BLACK

6,5 mm.

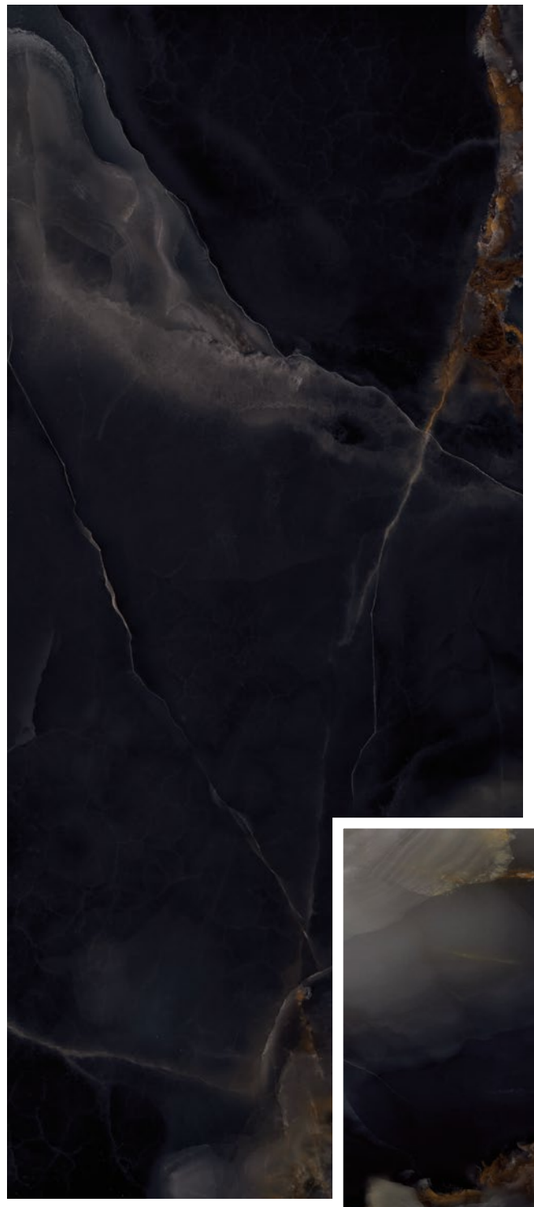

120x278 - $47^{1/4"}$x$109^{7/16"}$
Full Lappato Rett.
EKPF Onyx Black ● **T116**
6 patterns

9,5 mm.

90x90 - $35^{7/16"}$x$35^{7/16"}$
Full Lappato Rett.
EKTZ Onyx Black ● **T74**
14 patterns



120x120 - $47^{1/4"}$x$47^{1/4"}$
Full Lappato Rett.
ELDK Onyx Black ● **T110**
11 patterns

9,5 mm.

60x120 - $23^{5/8"}$x$47^{1/4"}$
Full Lappato Rett.
EKTM Onyx Black ● **T74**
20 patterns

Silktech R10 Rett.
EKT8 Onyx Black ● **T31**
19 patterns

9,5 mm.

30x60 - $11^{13/16"}$x$23^{5/8"}$
Full Lappato Rett.
EKTT Onyx Black ● **T42**
56 patterns

Silktech R10 Rett.
EKTF Onyx Black ● **T14**
52 patterns

St La tecnologia Silktech combina prestazioni antiscivolo elevate e una superficie ceramica setosa al tatto.
The Silktech technology combines excellent anti-slip performances with a ceramic surface that's silky to the touch.

Decori Decors | Decors | Dekore | Decorados | Декоры

ONYX IVORY

Intrecci*

30x30 - $11^{13/16"}$x$11^{13/16"}$
EKZR Onyx Ivory Full Lapp. ● **A102**
EKZK Onyx Ivory Silktech R10 ● **A100**

Mosaico 3x3*
Tessera - Chip 2,8x2,8 - $1^{1/8"}$x$1^{1/8"}$

30x30 - $11^{13/16"}$x$11^{13/16"}$
EKZD Onyx Ivory Full Lapp. ● **A100**
EKZ6 Onyx Ivory Silktech R10 ● **A96**


Mosaico 5x5*
Tessera - Chip 4,8x4,8 - $1^{7/8"}$x$1^{7/8"}$

30x30 - $11^{13/16"}$x$11^{13/16"}$
EKZ0 Onyx Ivory Full Lapp. ● **A90**
EKYU Onyx Ivory Silktech R10 ● **A86**

ONYX PINK


30x30 - $11^{13/16"}$x$11^{13/16"}$
EKZQ Onyx Pink Full Lapp. ● **A102**
EKZJ Onyx Pink Silktech R10 ● **A100**



30x30 - $11^{13/16"}$x$11^{13/16"}$
EKZC Onyx Pink Full Lapp. ● **A100**
EKZ5 Onyx Pink Silktech R10 ● **A96**


30x30 - $11^{13/16"}$x$11^{13/16"}$
EKYZ Onyx Pink Full Lapp. ● **A90**
EKYT Onyx Pink Silktech R10 ● **A86**

ONYX GREEN



30x30 - $11^{13/16"}$x$11^{13/16"}$
EKZS Onyx Green Full Lapp. ● **A102**
EKZL Onyx Green Silktech R10 ● **A100**



30x30 - $11^{13/16"}$x$11^{13/16"}$
EKZE Onyx Green Full Lapp. ● **A100**
EKZ7 Onyx Green Silktech R10 ● **A96**


30x30 - $11^{13/16"}$x$11^{13/16"}$
EKZ1 Onyx Green Full Lapp. ● **A90**
EKYV Onyx Green Silktech R10 ● **A86**

ONYX BLUE



30x30 - $11^{13/16"}$x$11^{13/16"}$
EKZT Onyx Blue Full Lapp. ● **A102**
EKZM Onyx Blue Silktech R10 ● **A100**



30x30 - $11^{13/16"}$x$11^{13/16"}$
EKZF Onyx Blue Full Lapp. ● **A100**
EKZ8 Onyx Blue Silktech R10 ● **A96**


30x30 - $11^{13/16"}$x$11^{13/16"}$
EKZ2 Onyx Blue Full Lapp. ● **A90**
EKYW Onyx Blue Silktech R10 ● **A86**

ONYX BLACK


30x30 - $11^{13/16"}$x$11^{13/16"}$
EKZP Onyx Black Full Lapp. ● **A102**
EKZH Onyx Black Silktech R10 ● **A100**


30x30 - $11^{13/16"}$x$11^{13/16"}$
EKZA Onyx Black Full Lapp. ● **A100**
EKZ4 Onyx Black Silktech R10 ● **A96**


30x30 - $11^{13/16"}$x$11^{13/16"}$
EKYY Onyx Black Full Lapp. ● **A90**
EKYS Onyx Black Silktech R10 ● **A86**

* Su rete in fibra - On fibre mesh backing - Sur filet en fibre de verre - Auf Glasfasernetz - Sobre malla de fibra - На волоконной сетке

TELE DI ONYX Marmo

Pezzi speciali Trims | Pieces Speciales | Formteile | Piezas Especiales | Специальные Изделия

	Dimensione Size	Onyx Ivory	Onyx Pink	Onyx Green	Onyx Blue	Onyx Black	Fascia di prezzo Price band
Battiscopa - Skirting	**Silktech R10 Rett.** 7x60 - $2^{3/4"}$x$23^{5/8"}$ Pcs. Box 15 - LM x Box 9,00	**EKZX**	**EKZW**	**EKZY**	**EKZZ**	**EKZV**	● **A11**
	Full Lapp. Rett. 7x60 - $2^{3/4"}$x$23^{5/8"}$ Pcs. Box 15 - LM x Box 9,00	**EL03**	**EL02**	**EL04**	**EL05**	**EL01**	● **A15**
	Full Lapp. Rett. 4,6x90 - $1^{13/16"}$x$35^{7/16"}$ Pcs. Box 8 - LM x Box 7,20	**EL1D**	**EL1C**	**EL1E**	**EL1F**	**EL1A**	● **A20**
Gradone - Step	**Silktech R10 Rett.** 33x120x3,2x3,2 $12^{15/16"}$x$47^{1/4"}$x$1^{1/4"}$x$1^{1/4"}$ Pcs. Box 2 - LM x Box 2,40	**EL09**	**EL08**	**EL0A**	**EL0C**	**EL07**	● **A98**
	Full Lapp. Rett. 33x120x3,2x3,2 $12^{15/16"}$x$47^{1/4"}$x$1^{1/4"}$x$1^{1/4"}$ Pcs. Box 2 - LM x Box 2,40	**EL0G**	**EL0F**	**EL0H**	**EL0J**	**EL0E**	● **A101**
Angolare Dx | Sx Corner Tile Right | Left	**Silktech R10 Rett.** 33x120x3,2x3,2 $12^{15/16"}$x$47^{1/4"}$x$1^{1/4"}$x$1^{1/4"}$ Pcs. Box 1 - LM x Box 1,20	Dx - Right **EL0N** Sx - Left **EL0U**	Dx - Right **EL0M** Sx - Left **EL0T**	Dx - Right **EL0P** Sx - Left **EL0V**	Dx - Right **EL0Q** Sx - Left **EL0W**	Dx - Right **EL0L** Sx - Left **EL0S**	● **A104**
	Full Lapp. Rett. 33x120x3,2x3,2 $12^{15/16"}$x$47^{1/4"}$x$1^{1/4"}$x$1^{1/4"}$ Pcs. Box 1 - LM x Box 1,20	Dx - Right **EL10** Sx - Left **EL16**	Dx - Right **EL0Z** Sx - Left **EL15**	Dx - Right **EL11** Sx - Left **EL17**	Dx - Right **EL12** Sx - Left **EL18**	Dx - Right **EL0Y** Sx - Left **EL14**	● **A106**

Imballi e pesi Packing and Weight | Emballages et Poids | Verpackung und Gewicht | Embalajes y Pesos | Упаковка и Вес

Formato Size Format Format Tamaño Формат cm	Spessore Thickness Epaisseur Stärke Espesor Толщина mm	Pz. x Mq. Pieces x Sqm Pcs / M² Stk. x Qm Pzs x Mc. Шт x Кв.М.	Pz. x Scat. Pieces x Box Pcs / Bte Stk. x Krt. Pzs x Caja Шт x Кор.	Mq. x Scat. Sqm x Box M² / Bte Qm x Krt. Mc. x Caja Кв.М. x Кор.	Peso x Scat. Weight x Box Poids / Bte Gewicht x Krt. Peso x Caja Вес x Кор. Kg	Scat. x Pal. Boxes x Pal. Bte / Pal. Krt. x Pal. Cajas x Pal. Кор. x Подд.	Mq. x Pal. Sqm x Pal. M² / Pal. Qm x Pal. Mc. x Pal. Кв.М x Подд.	Peso x Pal. Weight x Pal. Poids / Pal. Gewicht x Pal. Peso x Pal. Вес x Подд Kg
120x278 Full Lappato	6,5	0,30	1	3,336	50,04	vedi sotto - see below		
120x120 Full Lappato	6,5	0,69	2	2,880	43,20	20	57,60	864
90x180 Full Lappato	10	0,62	2	3,240	74,52	18	58,32	1341
90x90 Full Lappato	9,5	1,23	2	1,620	35,64	24	38,88	855
60x120 Silktech - Full Lappato	9,5	1,39	2	1,440	31,68	36	51,84	1140
30x60 Silktech - Full Lappato	9,5	5,56	6	1,080	23,76	48	51,84	1140
30x30 Mosaico 3X3 / 5X5 Silktech - Full Lappato	9,5	11,11	5	0,450	8,73	60	27,00	524
30x30 Intrecci Silktech - Full Lappato	9,5	11,11	5	0,450	8,73	60	27,00	524

Slabs 120x278

Articolo Item Reference Artikel Articulo Артикула	Dimensione (cm) Size (cm) Format (cm) Format (cm) Tamaño (cm) Формат (cm)	Nr. Lastre No. of Slabs Nbre Dalles Anz. Platten Nº de Placas Кол. Плит	Mq. x Imballo sqm per Pack M² / Emballage qm pro Verpackung M² por embalaje Кв.м. x упаковку	Peso Imballo (Kg) Weight of Packaging (kg) Poids Emballage (kg) Gewicht Verpackung (kg) Peso embalaje (kg) Вес упаковки (кг)	Peso Imballo+Lastre (Kg) Weight of Packaging + Slabs (kg) Poids Emballage+Dalles (kg) Gewicht Verpackung+Platten (kg) Peso embalaje + placas (kg) Вес упаковки + плит (кг)
Cassa - Crate - Caisse Kiste - Caja - Ящик	137x292x29h	5	16,68	107	357,20
	137x292x42h	18	60,05	143	1043,72
Cavalletto - A-Frame - Chevalet de transport - Transportgestell Caballete - Подставка	75x290x160h	40	133,44	180	2181,60

TELE DI ONYX Marmo

Porcelain Tiles
ISO 13006 Annex G - UNI EN 14411 Annex G - Bla GL
ANSI A137.1 - CLASS P1

Ceramics of Italy

CARATTERISTICHE TECNICHE Technical Features - Caracteristiques Techniquesa - Technische Eigenschaften Technische Eigenschaften - Caracteristicas Tecnicas - Технические Характеристики	NORMA Standard - Norme Norm - Norma - Норма	VALORI Value - Valeur Vorgabe - Valor - Средние	
ASSORBIMENTO D'ACQUA Water absorption - Absorption d'eau - Wasseraufnahme Absorción de agua - Поглощение воды	UNI EN ISO 10545/3 ASTM C373	Conforme Compliant	
RESISTENZA ALLA FLESSIONE Modulus of rupture - Resistance a la flexion - Biegefestigkeit Resistencia a la flexon - Прочность на изгиб	SPESSORE	**6,5 mm**	**9,5 / 10 mm**
	UNI EN ISO 10545/4	≥ 35 N/mm²	≥ 45 N/mm²
FORZA DI ROTTURA Breaking strength - Résistance à la rupture - Bruchlast Resistencia a la rotura - Разрывное усилие	UNI EN ISO 10545/4	≥ 700 N	≥ 2000 N
	ASTM C648	≥ 175 lbs	≥ 400 lbs
RESISTENZA AL GELO Frost resistance - Résistance au gel - Frostbeständigkeit Resistencia a las heladas - Морозостойкость	UNI EN ISO 10545/12	Conforme	
	ASTM C1026	Unaffected	
RESISTENZA CHIMICA AD ALTE E BASSE CONCENTRAZIONI DI ACIDI E BASI Chemical resistance to high and low acid and basic concentrations Résistance chimique aux hautes et basses concentrations d'acides et de bases Chemikalienfestigkeit bei hohen und niedrigen Konzentrationen von Säuren und Basen Resistencia química con concentraciones altas y bajas de ácidos y bases Химическая стойкость к высоким и низким концентрациям кислот и щелочей	UNI EN ISO 10545/13	A - LA - HA	
	ASTM C-650	Unaffected	
RESISTENZA ALLE MACCHIE Stain resistance - Résistance aux taches - Fleckenbeständigkeit Resistencia a las manchas - Стойкость к образованию пятен	UNI EN ISO 10545/14	5	
	ASTM C1378	Class A	
COEFFICIENTE DI ATTRITO Slip resistance Coefficient de glissement Rutschfestigkeit Barfußbereich Coeficiente de atrito medio Коэффициент трения		**SILKTECH**	**FULL LAPP.**
	DIN EN 16165 Annex B	R10	-
	DIN EN 16165 Annex A	B (A+B)	-
	ANSI A326.3:2017 DCOF	WET ≥ 0,50	-
	B.C.R.A. D.M. N. 236 14/6/89	> 0,40	-
	AS 4586-2013 Anexo A	P3	-
	BS 7976-2: 2002 BSEN13036-4:2011 Pendulum testers	> 36 Low Slip potential	-
	UNE 41901:2017 EX DB SUA (actual)	2	-

Per maggiori chiarimenti sui dati tecnici e sulla garanzia consultare il catalogo generale in vigore. - For further information on technical specifications, please consult our up-dated general catalogue.- Pour toutes informations supplementaires sur les donnees techniques et sur les garanties, veuillez consulter le catalogue general en vigueur. - Für weitere Informationen über technische Daten und Garantie beziehen sie sich bitte auf den aktuellen Gesamtkatalog. - Para ulteriores informaciones sobre los datos tecnicos y la garantia, vease el catalogo general en vigor. - Более подробную информацию о технических данных и гарантии смотрите в действующем сводном катал.

GREENGUARD GOLD — PRODUCT CERTIFIED FOR LOW CHEMICAL EMISSIONS: UL.COM/GG UL 2818

mindful MATERIALS

120x278

放射性水平A类

15% 9 mm
0% 6,5 mm
valori medi - average values

SILKTECH R10 HEAVY COMMERCIAL HT

FULL LAPPATO LIGHT COMMERCIAL mT

SHADE VARIATION V3 High

EMIL CERAMICA

A Brand of Emilceramica S.r.l. a socio unico

USGBC MEMBER

GREEN BUILDING COUNCIL ITALIA SOCIO

CONFINDUSTRIA PER LA SOSTENIBILITÀ

CERTIFIED MANAGEMENT SYSTEMS CQY CERTIQUALITY
UNI EN ISO 9001:2015
UNI EN ISO 14001:2015
UNI ISO 45001:2018
UNI CEI EN ISO 50001:2018

I colori e le caratteristiche estetiche dei materiali illustrati nel presente catalogo sono da ritenersi puramente indicativi. Le misure dei prodotti qui indicate si intendono nominali e come i pesi ed i colori subiscono le variazioni tipiche del processo ceramico. Ergon si riserva la facoltà di modificare in qualunque momento senza preavviso le caratteristiche tecniche, estetiche e i materiali presentati. Tali caratteristiche non sono comunque vincolanti nei termini legali.


Colours and optical features of the materials illustrated in this catalogue are to be regarded as mere indications. Product sizes indicated are nominal and like weights and colours undergo the typical variations of the ceramic process. Ergon reserves the right to change the technical and optical features of the materials illustrated at any time and without notice. These features are not legally binding.

TELE DI ONYX Marmo

La tecnologia Silktech combina prestazioni antiscivolo elevate e una superficie ceramica setosa al tatto.
The Silktech technology combines excellent anti-slip performances with a ceramic surface that's silky to the touch.
www.emilgroup.com/technologies/#silktech

STORMY NIGHT

6,5 mm.

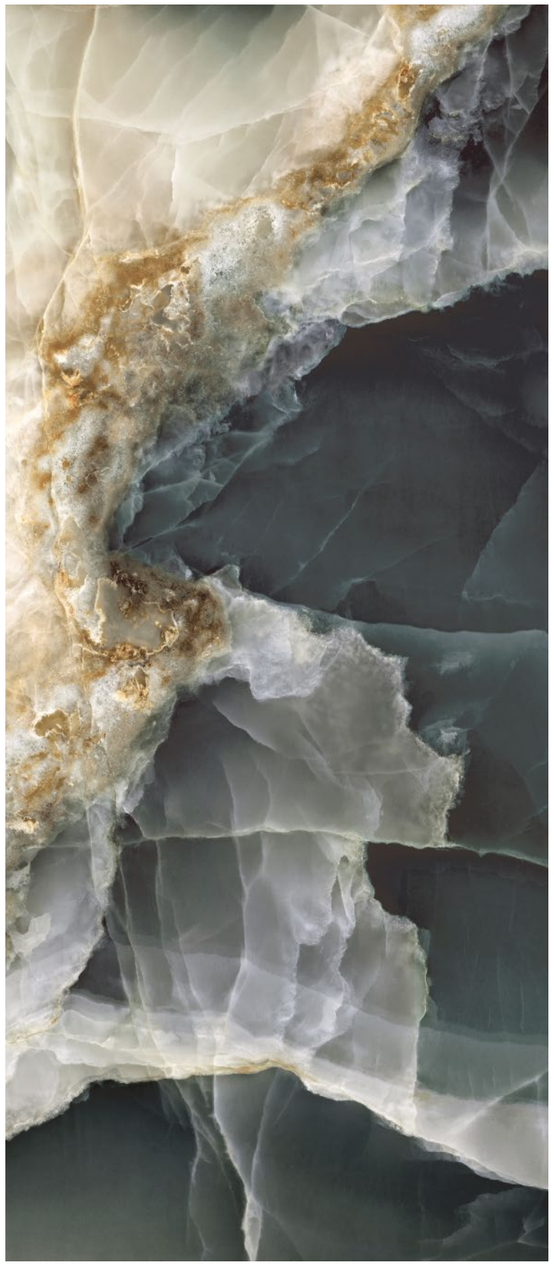

9 mm.

120x120 - $47^{1/4"}$x$47^{1/4"}$
Full Lappato Rett.
EP2H Stormy Night

60x120 - $23^{5/8"}$x$47^{1/4"}$
Full Lappato Rett.
EP2Z Stormy Night

Silktech Rett.
EP2X Stormy Night

120x278 - $47^{1/4"}$x$109^{7/16"}$
Full Lappato Rett.
EP2K Stormy Night

Per la gamma completa della collezione consultare il catalogo Tele di Marmo Onyx. - For the complete collection, please refer to the Tele di Marmo Onyx catalogue.
Pour voir la gamme complète de la collection, consulter le catalogue Tele di Marmo Onyx. - Die komplette Kollektion finden Sie im Katalog von Tele di Marmo Onyx.
Para descubrir la gama completa de la colección, consulte el catálogo Tele di Marmo Onyx. - Полную линейку изделий этой коллекции смотрите в каталоге Tele di Marmo Onyx.

Verificare l'abbinamento dei toni tra i formati differenti. - Check the colour matching between different sizes. - Vérifier l'assortiment des tonalités entre les différents formats. - Die Kombination der Farbtöne unter den verschiedenen Formaten prüfen. - Comprobar la combinación de los tonos entre los distintos formatos. - Проверьте сочетание тонов у разных форматов.

Si consiglia la posa con fuga 2 mm. - Laying with a 2 mm-joint is recommended. - Pose recommandée avec joints de 2 mm.
Es wird eine Fugenbreite von 2 mm empfohlen. Se recomienda la colocación con juntas de 2 mm. - Рекомендуется укладка с швом 2 мм.

TELE DI ONYX Marmo

La tecnologia Silktech combina prestazioni antiscivolo elevate e una superficie ceramica setosa al tatto.
The Silktech technology combines excellent anti-slip performances with a ceramic surface that's silky to the touch.
www.emilgroup.com/technologies/#silktech

STORMY DAY

6,5 mm.



9 mm.

120x120 - $47^{1/4"}$x$47^{1/4"}$
Full Lappato Rett.
EP2G Stormy Day

Silktech Rett.
EP3X Stormy Day

60x120 - $23^{5/8"}$x$47^{1/4"}$
Full Lappato Rett.
EP2Y Stormy Day

Silktech Rett.
EP2W Stormy Day

120x278 - $47^{1/4"}$x$109^{7/16"}$
Full Lappato Rett.
EP2J Stormy Day


Per la gamma completa della collezione consultare il catalogo Tele di Marmo Onyx. - For the complete collection, please refer to the Tele di Marmo Onyx catalogue.
Pour voir la gamme complète de la collection, consulter le catalogue Tele di Marmo Onyx. - Die komplette Kollektion finden Sie im Katalog von Tele di Marmo Onyx.
Para descubrir la gama completa de la colección, consulte el catálogo Tele di Marmo Onyx. - Полную линейку изделий этой коллекции смотрите в каталоге Tele di Marmo Onyx.

Verificare l'abbinamento dei toni tra i formati differenti. - Check the colour matching between different sizes. - Vérifier l'assortiment des tonalités entre les différents formats. - Die Kombination der Farbtöne unter den verschiedenen Formaten prüfen. - Comprobar la combinación de los tonos entre los distintos formatos. - Проверьте сочетание тонов у разных форматов.

Si consiglia la posa con fuga 2 mm. - Laying with a 2 mm-joint is recommended. - Pose recommandée avec joints de 2 mm.
Es wird eine Fugenbreite von 2 mm empfohlen. Se recomienda la colocación con juntas de 2 mm. - Рекомендуется укладка с швом 2 мм.

TELE DI ONYX Marmo

Mosaico 5x5*
Tessera - Chip 4,8x4,8 - $1^{7/8"}$x$1^{7/8"}$



30x30 - $11^{13/16"}$x$11^{13/16"}$
Full Lappato
EP6P Stormy Night

Silktech R10
EP6R Stormy Night



30x30 - $11^{13/16"}$x$11^{13/16"}$
Full Lappato
EP6N Stormy Day

Silktech R10
EP6Q Stormy Day

Intrecci*



30x30 - $11^{13/16"}$x$11^{13/16"}$
Full Lappato
EP7P Stormy Night

Silktech R10
EP7M Stormy Night



30x30 - $11^{13/16"}$x$11^{13/16"}$
Full Lappato
EP7N Stormy Day

Silktech R10
EP7L Stormy Day

* Su rete in fibra - On fibre mesh backing - Sur filet en fibre de verre - Auf Glasfasernetz - Sobre malla de fibra - На волоконной сетке

PEZZI SPECIALI

Trims | Pieces Speciales | Formteile | Piezas Especiales | Специальные Изделия

	Dimensione Size	 Stormy Night		 Stormy Day	
 Battiscopa - Skirting	**Silktech R10 Rett.** 7x60 - $2^{3/4}$x$23^{5/8"}$ Pcs. Box 16 - LM x Box 9,60	**EP8L**		**EP8K**	
	Full Lapp. Rett. 7x60 - $2^{3/4}$x$23^{5/8"}$ Pcs. Box 16 - LM x Box 9,60	**EP8N**		**EP8M**	
 Gradone - Step	**Silktech R10 Rett.** 33x120x3,2x3,2 $12^{15/16"}$x$47^{1/4"}$x$1^{1/4"}$x$1^{1/4"}$ Pcs. Box 2 - LM x Box 2,40	**EPC3**		**EPC2**	
	Full Lapp. Rett. 33x120x3,2x3,2 $12^{15/16"}$x$47^{1/4"}$x$1^{1/4"}$x$1^{1/4"}$ Pcs. Box 2 - LM x Box 2,40	**EPC5**		**EPC4**	
 Angolare Dx | Sx Corner Tile Right | Left	**Silktech R10 Rett.** 33x120x3,2x3,2 $12^{15/16"}$x$47^{1/4"}$x$1^{1/4"}$x$1^{1/4"}$ Pcs. Box 1 - LM x Box 1,20	Dx Right **EPA6**	Sx Left **EPA8**	Dx Right **EPA5**	Sx Left **EPA7**
	Full Lapp. Rett. 33x120x3,2x3,2 $12^{15/16"}$x$47^{1/4"}$x$1^{1/4"}$x$1^{1/4"}$ Pcs. Box 1 - LM x Box 1,20	Dx Right **EPAA**	Sx Left **EPAD**	Dx Right **EPA9**	Sx Left **EPAC**

Regole di manutenzione, pulizia e protezione
Maintenance, cleaning, and protection rules

TELE DI Marmo | TELE DI ONYX Marmo

Ceramics of Italy

Porcelain Tiles
ISO 13006 Annex G - UNI EN 14411 Annex G - Bla GL
ANSI A137.1 - CLASS P1

CARATTERISTICHE TECNICHE Technical Features - Caracteristiques Techniquesa - Technische Eigenschaften Technische Eigenschaften - Caracteristicas Tecnicas - Технические Характеристики	NORMA Standard - Norme Norm - Norma - Норма	VALORI Value - Valeur Vorgabe - Valor - Средние	
ASSORBIMENTO D'ACQUA Water absorption - Absorption d'eau - Wasseraufnahme Absorción de agua - Поглощение воды	UNI EN ISO 10545/3	Conforme	
	ASTM C373	Compliant	
RESISTENZA ALLA FLESSIONE Modulus of rupture - Resistance a la flexion - Biegefestigkeit Resistencia a la flexon - Прочность на изгиб	SPESSORE	**6,5 mm**	**9 mm**
	UNI EN ISO 10545/4	≥ 35 N/mm²	≥ 45 N/mm²
FORZA DI ROTTURA Breaking strength - Résistance à la rupture - Bruchlast Resistencia a la rotura - Разрывное усилие	UNI EN ISO 10545/4	≥ 700 N	≥ 2000 N
	ASTM C648	≥ 175 lbf	≥ 400 lbf
RESISTENZA AL GELO Frost resistance - Résistance au gel - Frostbeständigkeit Resistencia a las heladas - Морозостойкость	UNI EN ISO 10545/12	Conforme	
	ASTM C1026	Unaffected	
RESISTENZA CHIMICA **AD ALTE E BASSE CONCENTRAZIONI DI ACIDI E BASI** Chemical resistance to high and low acid and basic concentrations Résistance chimique aux hautes et basses concentrations d'acides et de bases Chemikalienfestigkeit bei hohen und niedrigen Konzentrationen von Säuren und Basen Resistencia química con concentraciones altas y bajas de ácidos y bases Химическая стойкость к высоким и низким концентрациям кислот и щелочей	UNI EN ISO 10545/13	A - LA - HA	
	ASTM C-650	Unaffected	
RESISTENZA ALLE MACCHIE Stain resistance - Résistance aux taches - Fleckenbeständigkeit Resistencia a las manchas - Стойкость к образованию пятен	UNI EN ISO 10545/14	5	
	ASTM C1378	Class A	
COEFFICIENTE DI ATTRITO Slip resistance Coefficient de glissement Rutschfestigkeit Barfußbereich Coeficiente de atrito medio Коэффициент трения		**SILKTECH**	**FULL LAPPATO / BRUSHED**
	DIN EN 16165 Annex B	R10	-
	DIN EN 16165 Annex A	B (A+B)	-
	ANSI A326.3:2017 DCOF	WET ≥ 0,50	-
	B.C.R.A. D.M. N. 236 14/6/89	> 0,40	-
	AS 4586-2013 Anexo A	P3	-
	PENDOLO BS 7976 BSEN13036-4:2011 Pendulum testers	> 36 Low Slip potential Both Sliders	-
	UNE 41901:2017 EX DB SUA (actual)	2	-

Per maggiori chiarimenti sui dati tecnici e sulla garanzia consultare il catalogo generale in vigore. - For further information on technical specifications, please consult our up-dated general catalogue.- Pour toutes informations supplementaires sur les donnees techniques et sur les garanties, veuillez consulter le catalogue general en vigueur. - Für weitere Informationen über technische Daten und Garantie beziehen sie sich bitte auf den aktuellen Gesamtkatalog. - Para ulteriores informaciones sobre los datos tecnicos y la garantia, vease el catalogo general en vigor. - Более подробную информацию о технических данных и гарантии смотрите в действующем сводном катал.

GREENGUARD GOLD — PRODUCT CERTIFIED FOR LOW CHEMICAL EMISSIONS: UL.COM/GG UL 2818

mindful MATERIALS

120x278

放射性水平A类

15% 9 mm
0% 6,5 mm
valori medi - average values

SILKTECH HEAVY COMMERCIAL HT

FULL LAPPATO BRUSHED LIGHT COMMERCIAL MT

SHADE VARIATION V3 High

IMBALLI E PESI

Packing and Weight | Emballages et Poids | Verpackung und Gewicht | Embalajes y Pesos | Упаковка и Вес

Formato Size Format Format Tamaño Формат cm	Spessore Thickness Epaisseur Stärke Espesor Толщина mm	Pz. x Mq. Pieces x Sqm Pcs / M² Stk. x Qm Pzs x Mc. Шт x Кв.М.	Pz. x Scat. Pieces x Box Pcs / Bte Stk. x Krt. Pzs x Caja Шт x Кор.	Mq. x Scat. Sqm x Box M² / Bte Qm x Krt. Mc. x Caja Кв.М. x Кор.	Peso x Scat. Weight x Box Poids / Bte Gewicht x Krt. Peso x Caja Вес x Кор. Kg	Scat. x Pal. Boxes x Pal. Bte / Pal. Krt. x Pal. Cajas x Pal. Кор. x Подд.	Mq. x Pal. Sqm x Pal. M² / Pal. Qm x Pal. Mc. x Pal. Кв.М x Подд.	Peso x Pal. Weight x Pal. Poids / Pal. Gewicht x Pal. Peso x Pal. Вес x Подд Kg
120x278 Full Lapp. - Brushed	6,5	0,30	1	3,336	50,04	vedi sotto - see below		
120x120 Silktech R10 - Full Lapp.	9	0,69	1	1,440	30,24	36	51,84	1089
60x120 Silktech R10 - Full Lapp. - Brushed	9	1,39	2	1,440	30,24	36	51,84	1089
30x30 Mosaico 5x5 Silktech - Full Lapp. - Brushed	9	11,11	5	0,450	8,73	60	27,00	524
30x30 Intrecci Silktech R10 - Full Lapp. - Brushed	9	11,11	5	0,450	8,73	60	27,00	524

Slabs 120x278

Articolo Item Reference Artikel Articulo Артикула	Dimensione (cm) Size (cm) Format (cm) Format (cm) Tamaño (cm) Формат (cm)	Nr. Lastre No. of Slabs Nbre Dalles Anz. Platten Nº de Placas Кол. Плит	Mq. x Imballo sqm per Pack M² / Emballage qm pro Verpackung M² por embalaje Кв.м. x упаковку	Peso Imballo (Kg) Weight of Packaging (kg) Poids Emballage (kg) Gewicht Verpackung (kg) Peso embalaje (kg) Вес упаковки (кг)	Peso Imballo+Lastre (Kg) Weight of Packaging + Slabs (kg) Poids Emballage+Dalles (kg) Gewicht Verpackung+Platten (kg) Peso embalaje + placas (kg) Вес упаковки + плит (кг)
 Cassa - Crate - Caisse Kiste - Caja - Ящик	137x292x29h	5	16,68	107	357,20
	137x292x42h	18	60,05	145	1045,72
 Cavalletto - A-Frame - Chevalet de transport - Transportgestell Caballete - Подставка	75x290x160h	40	133,44	180	2181,60

EMIL CERAMICA

A Brand of Emilceramica S.r.l. a socio unico

USGBC MEMBER

GREEN BUILDING COUNCIL ITALIA

CONFINDUSTRIA PER LA SOSTENIBILITÁ

CERTIFIED MANAGEMENT SYSTEMS CQY CERTIQUALITY
UNI EN ISO 9001:2015
UNI EN ISO 14001:2015
UNI ISO 45001:2018
UNI CEI EN ISO 50001:2018